



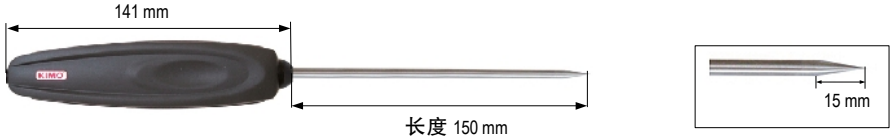
100 系列手持式测量仪专用 热敏电阻 NTC 温度探头




■ NTC 温度探头

■ 通用型温度探头	量程	t_{63}	型号
<p>NTC 热敏电阻 (符合 IEC 751) 不锈钢材质套管 塑料握把 (-40 ~ +85 °C)</p>   <p>固定式 mini-DIN 接头 卷式电缆, 长度 450 mm 最长可至 2.4 m</p>	-40 ... +120 °C	12 秒	SNG 150
			

■ 环境空气温度探头	量程	t_{63}	型号
<p>NTC 热敏电阻 (符合 IEC 751) 不锈钢材质套管顶端有孔 塑料握把 (-40 ~ +85 °C)</p>   <p>固定式 mini-DIN 接头 卷式电缆, 长度 450 mm 最长可至 2.4 m</p>	-40 ... +120 °C	10 秒	SNA 150
			

■ 插入式温度探头	量程	t_{63}	型号
<p>NTC 热敏电阻 (符合 IEC 751) 不锈钢材质套管尖形顶端 塑料握把 (-40 ~ +85 °C)</p>   <p>固定式 mini-DIN 接头 卷式电缆, 长度 450 mm 最长可至 2.4 m</p>	-40 ... +120 °C	10 秒	SNP 150
			

■ 探头延长杆

■ 探头使用	型号
<p>延长杆用于连接探头</p>  <p>长度 1 m</p>	RTS